



NEW Product Information

BD-C26SS-A Slim Slot Blu-ray ROM / DVD Super Multi Drive **6x BD-ROM Readable** **8x DVD±R Writable** **4x DVD±R DL Writable**

- Half inch height (12.7mm) standard design
- Buffer underrun prevention
- Supporting disc-at-once, session-at-once, packet write, incremental, over write, track-at-once recording mode, sequential write, multi-session, and back ground format, BD-Hybrid (only BD Layer)
- Horizontal and vertical mounting for most system configuration

Write Speed (Max Speed)	DVD±R	8x (PCAV)
	DVD±R DL	4x (ZCLV)
	DVD+RW	8x (ZCLV)
	DVD-RW	6x (ZCLV)
	DVD-RAM	5x (PCAV)
CD-R	US	24x (PCAV)
	HS	10x (CLV)
	MS	4x (CLV)
Read Speed (Max Speed)	BD-ROM (SL) / BD-R (SL)	6x (CAV)
	BD-ROM (DL) / BD-R (DL) / RE	4x (CAV)
	DVD-ROM / ±R	8x (CAV)
	DVD±R DL (Finalized Disc)	6x (CAV)
	DVD±RW	8x (CAV)
	DVD-RAM (4.7G)	5x (PCAV)
	CD-ROM / R / RW	24x (CAV)

Disc Diameter	12cm, 8cm
Interface	SerialATA Revision 3.0
Data Transfer Rate	Gen1 i 1.5Gbps
Random Access Time	250ms (MAX) BD-ROM
	180ms (MAX) DVD-ROM
	180ms (MAX) CD-ROM

Data Buffer	2MB
Loading Mechanism	Slot Loading Type
Environmental Conditions	
Ambient Temperatures	Operating 5 to 50°C Non Operating -40 to 65°C
Ambient Humidity	Operating 10 to 80% (non-condensing) Non Operating 10 to 90% (non-condensing)*

Power Requirements	DC5V±5%
Loading / Ejecting Life	10,000 times or more
Current Consumption	Standby / Sleep 80mA / 80mA (Average current max) During starting / Seek 1500mA / 1000mA (Max, Spikes less 2ms)


MTBF	60,000POH (10% duty)
Safety / EMI Standards	UL, CUL, TÜV, CB, CE and BSMI
Dimensions	128.0W x 12.7H x 129.4D (mm)
Mass (Weight)	175g or less
RoHS Directive	Complied

Remark
Please check the specification sheets for detailed conditions and other information.
* The maximum wet-bulb temp. is 29.4 degree C

"Blu-ray" and "Blu-ray Disc" logo are trademarks of Blu-ray Disc Association.

is a trademark of DVD Format/Logo Licensing Corporation registered in the U.S., Japan and other countries.

and are trademarks of Koninklijke Philips Electronics N.V.

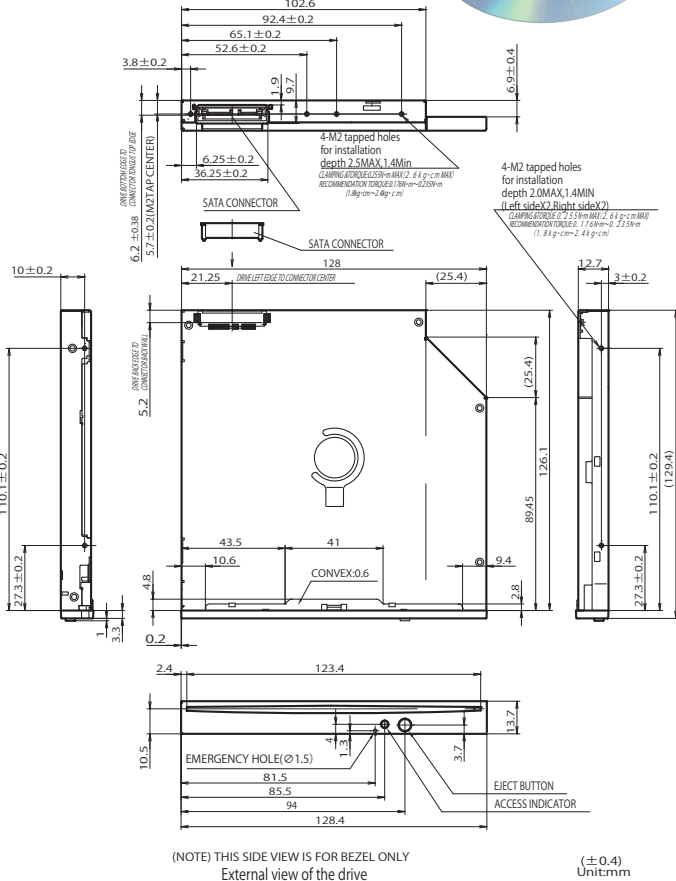

Other company names and product names in this document are the trademarks or registered trademarks of their respective owners. Features and specifications are subject to change without notice. Precaution : To ensure safe handling and operation, read the Instruction Manual before use.

TEAC CORPORATION Storage Device Sales Department, Information Products Division

TEAC CORPORATION (<http://www.teac.co.jp>) 1-47 Ochiai, Tama-shi, Tokyo 206-8530 Japan Phone:81-42-356-9153 Fax:81-42-356-9184

TEAC AMERICA, INC. (<http://www.teac.com>) 7733 Telegraph Road, Montebello, California 90640, U.S.A. Phone:1-323-726-0303 Fax:1-323-727-7656

TEAC EUROPE GmbH. (<http://www.teac.de>) Bahnstrasse 12, 65205 Wiesbaden-Erbenheim, Germany Phone:49-611-71580 Fax:49-611-7158-392

TAIWAN TEAC CORPORATION (<http://www.teac.com.tw>) 3F No.45, Sec.1 Min Chuan E. Road, 104 Taipei, Taiwan R.O.C. Phone:886-2-2597-8608 Fax:886-2-2597-8591

© Copyright TEAC CORPORATION 2011